
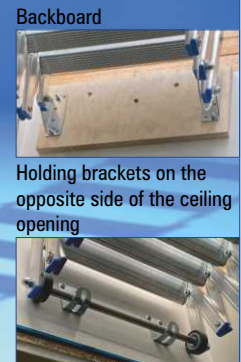


StirnBrett

Aluminium concertina loft ladder with backboard

- 11 cm deep, corrugated steps
- Stair width 40 cm
- For ceiling openings from 80 x 60 cm (L x W)

Suitable for replacing an old loft ladder, refitting an existing attic hatch or under skylight windows. During operation, the guidance head of the tension rod is twisted around the foot rail of the stair section, thus guiding the staircase in a controlled manner. When not in use, the bottom end of the staircase rests in the holding brackets on the opposite side of the ceiling opening.

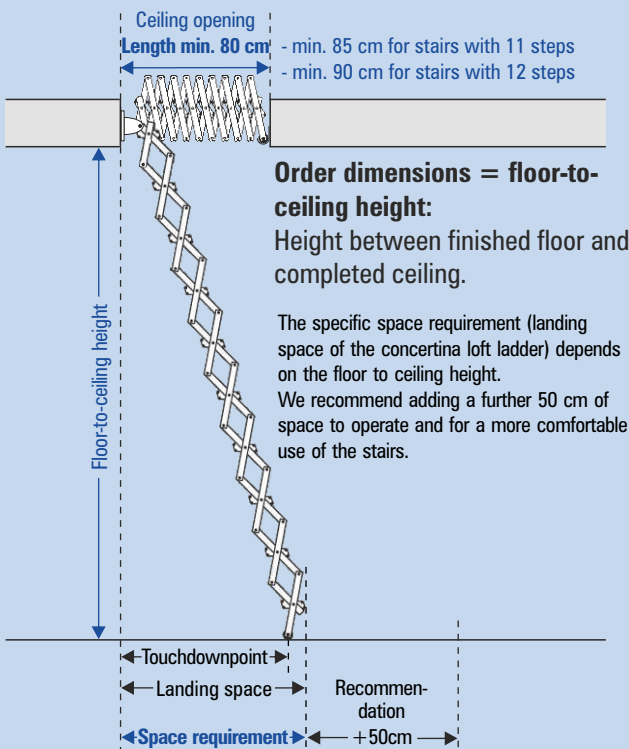

Measurements:

Steps	Floor-to-ceiling height	Space requirement
9	214 - 242	91
10	243 - 269	100
11*	270 - 296	108
12**	297 - 320	117

Measurements in centimetres. We recommend adding a further 50 cm of space to operate and for a more comfortable use of the stairs. Ceiling opening minimum length: *85 cm, **90 cm

Notes:

There must be no obstacles in the area under the stairs; any existing hatch door should open 90°. For elevated installation (e.g. in a shaft), adjust the ordering height. Standard position backboard 4 cm above the lower edge of the ceiling.

Scope of delivery:

Concertina stairs section with 11 cm deep steps, backboard (18 mm thick multiplex board, 41.2 x 17.6 cm), fixing screws, holding brackets (opposite side) for staircase section, guidance head for tension rod. Provide tension rod Ø24 mm on site, recommended length min. 120 cm.

